


## APS 10000L, Self Bunded Fuel Tank. Safe Fill Level 9,000 Liters

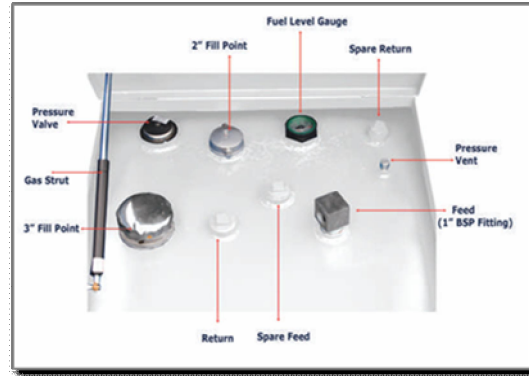

### Salient Features

- ü Tanks are fabricated from high grade mild steel
- ü All APS Bunded Tanks contain Lap-Joint double welded seams for extra strength
- ü Approved Bunded Fuel Tank, Compliant with Pollution Prevention Guidelines (PPG2/PPG26)
- ü 2 way Fork Pockets and Lifting eyes on Two sides are provided for easy and safe handling
- ü Frame designed for Multi Stacking for economical storage and transportation in Containers & Truck Beds
- ü Space efficient design : Can easily stack up to 2 high when full and 3 High when empty
- ü Internal Baffles included in all tanks to prevent Fuel Surge
- ü Unique Hex Corners for extra strength and Hose Openings in front to allow tank to be used when locked
- ü Bunded outer tank capacity 110% of volume and removable inner tank for maintenance and cleaning
- ü Outer Bund acting as a protective framework for extra security
- ü Four Feed & Four Returns as standard Connection to Multiple Equipments
- ü Secure Lid with Lockable Hatches , one at each end of the tank
- ü Inner and Outer tanks sand blasted and primed to SA 2.5
- ü Three quotes of Paint for the Outer Tank (Epoxy zinc rich primer, Epoxy high build & Polyurethane surface)
- ü Two coats of Paint for the Inner Tank (Epoxy zinc rich primer and Polyurethane surface painting)
- ü ISO 9001 under process

### Dimensions, Weights and other Specifications

<u>Dimensions, Weights and other Specifications</u>			
Tare Weight	4,500 Kg	Capacity in Litres	10,000 L
Laden Weight	13,000* Kg	Capacity in Gallons	2,200 G
Length	6,058 mm	Inner Tank Thickness	6 mm
Width	2,438 mm	Outer Bund Thickness	5 mm
Height	1,295 mm	Hose Pockets – 2 on each side	4

\*Calculations based on safe fill level at 95% of total tank capacity and specific gravity of diesel at 0.9. Above Tank Picture is for illustration purpose only